

Please type a plus sign (+) in this box → ☐ +

PTO/SB/05 (4/98)

Approved for use through 09/30/2000. OMB 0651-0032  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# UTILITY PATENT APPLICATION TRANSMITTAL

Attorney Docket No. WRP-002.01 (22190-201)  
First Inventor or Application Identifier Magalhaes et al.  
Title GAS INJECTION MOULDING METHOD AND APPARATUS  
Express Mail Label No. EL354728435US

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

1. ☒ \*Fee Transmittal Form (e.g. PTO/SB/17)  
(Submit an original and a duplicate for fee processing)
2. ☒ Specification (Total pages 21)  
(preferred arrangement set forth below)
- Descriptive title of the Invention
  - Cross References to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to Microfiche Appendix
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) (Total Sheets 8)
4. Oath or Declaration (Total Sheets)
- a. ☐ Executed (original or copy)
- b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))  
(for continuation/divisional with Box 16 completed)
- i. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. § 1.63(d)(2) and 1.33(b).

5. ☐ Microfiche Computer Program (Appendix)
6. ☐ Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

7. ☐ executed Assignment Papers, still proper and applicable.
8. ☐ 37 C.F.R. § 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
13. ☐ Small Entity Statement(s) (Statement filed in prior application. Status still proper and desired.)
14. ☒ Certified Copy of Priority Document(s)-to follow  
(if foreign priority is claimed)
15. ☒ Other: Cert. of Express Mail & Claims Sheet

**\*NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).**

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary

☐ Continuation ☐ Divisional ☐ Continuation-in-part ☐ of prior application /

**X claims priority under 35 U.S.C. § 119(a) to Great Britain Application Nos. GB 9916740.5 filed July 17, 1999 and GB 0013181.3 filed June 1, 2000, which are incorporated herein by reference.**

**For CONTINUATION or DIVISIONAL APPS only:** The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

## 17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label: ☐ Correspondence address below  
(Insert Customer No. or Attach bar code label)

Name	Chinh H. Pham				
	Foley, Hoag & Eliot, LLP				
Address	One Post Office Square				
City	Boston	State	MA	Zip Code	02109
Country	United States	Telephone	(617) 832-1000	Fax	(617) 832-7000

Name (Print/Type) Chinh H. Pham

Registration No. (Attorney/Agent)

39,329

Signature

Date

July 17, 2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent


<b>PATENT APPLICATION CLAIMS SHEET</b> Ch Patent Group Foley, Hoag & Eliot LLP One Post Office Square Boston, MA 02109-2170	Atty.Docket Number  WRP-002.01 (22190-201)
---	---

### CLAIMS AS FILED

	NUMBER FILED	NUMBER EXTRA	RATE	FEE
BASIC FEE (37 CFR 1.16(a))			\$690	\$ 690.00
TOTAL CLAIMS (37 CFR 1.16(c))	30 -20=		x \$18	\$
INDEPENDENT CLAIMS (37 CFR 1.16(b))	7 -3=		x \$78	\$
MULTIPLE DEPENDENT CLAIM PRESENT		(37 CFR 1.16(d))	\$0	\$0
* NUMBER EXTRA MUST BE ZERO OR LARG			<b>TOTAL</b>	\$
If applicant has small entity status under 37 CFR 1.9 and 1.27 then divide total fee by 2, and enter amount here.			<b>SMALL ENTITY</b>	\$


#### Certificate of Express Mail

I hereby certify that this correspondence is being deposited with the United States Postal Service as Express Mail, postage prepaid, "Post Office to Addressee", in an envelope addressed to the Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231 on this date of July 17, 2000.



Eugene Coker  
Express Mail Label: EL354728413US

Date of Deposit: July 17, 2000

  
Chinh H. Pham  
Reg. No. 39,329

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICATION FOR A PATENT  
for  
GAS INJECTION MOULDING METHOD AND APPARATUS

Inventors: **Rui Miguel de Azevedo Magalhaes**  
179 Rugby Road  
Leamington Spa  
CV32 6DR  
UK

**Gordon Frederick Smith**  
31 Myton Crescent  
Warwick  
CV34 6QA  
UK

Attorney Docket: WRP-002.01

Attorneys:  
FOLEY, HOAG & ELIOT LLP  
One Post Office Square  
Boston, MA 02109  
(617) 832-1000

O:\SPECS\KRTVP43792-3

## **Gas Injection Moulding Method and Apparatus**

This invention relates to an improved method and apparatus for gas injection moulding.

In conventional gas assisted or gas injection moulding methods, melt material is first injected into a mould. The melt, which may be a polymer or other suitable material, is then forced against the interior of the mould using injected gas within the melt. The melt and mould are then allowed to cool so that the melt hardens forming the injected moulding product, this cooling stage being by far the longest part of the injection moulding cycle. Minimisation of this cooling stage is extremely important, as it has a major influence on the reduction of the overall injection moulding time. This also has capital benefits in reducing manufacturing costs.

It is an object of the present invention to provide an improved method of, and apparatus for, gas injection moulding.

According to one aspect of the invention there is a method of gas injection moulding comprising injecting a melt into a mould and injecting gas into the melt to form a gas cavity in the melt, wherein the injection gas is cooled preferably to below the external ambient air temperature before being injected into the melt.

According to another aspect of the invention, there is a gas injection moulding method comprising injecting a melt into a mould and injecting gas into the melt to form a gas cavity in the melt, utilising injection gas having a temperature lower than that of ambient air temperature.

According to a further aspect of the invention, there is a gas injection moulding method using a mould having a melt inlet aperture, gas inlet aperture and gas outlet aperture, comprising the following stages:

- (a) injecting a melt into the mould;
- (b) injecting gas from the inlet aperture in the mould into the melt to form a gas cavity within the melt;
- (c) forming a gas channel between the gas cavity and the gas outlet aperture in the mould and
- (d) providing gas flow through the cavity between the gas inlet and outlet apertures.

According to another aspect of the invention, there is provided a gas injection moulding method wherein a mould is provided comprising gas inlet and gas outlet apertures and the method includes the step of flowing the injection gas between the gas inlet and outlet apertures in use.

Preferably, the injection gas is nitrogen. The temperature of the injected gas may be in the range 0°C to -176 °C, preferably in the range -10 °C to -50 °C, and most preferably about -25 °C. The pressure of the gas in the mould can be in the range 10 to 350 bar.

According to yet another aspect of the invention, there is provided apparatus for gas injection moulding comprising a mould having inlet apertures for the ingress of gas and melt material into the mould, wherein, melt material is injected into the mould and gas is injected into the melt material to form a gas cavity in the melt, and wherein gas having a temperature lower than the ambient air temperature is used as the injection gas.

According to a yet further aspect of the invention, there is provided an apparatus for gas injection moulding comprising a mould having inlet apertures for

the ingress of gas melt material into the mould, and outlet apertures for the egress of gas and melt from the mould, and wherein use of the apparatus comprises the following stages:

- (a) injecting a melt into the mould;
- (b) injecting gas from an inlet aperture in the mould into the melt to form a gas cavity within the melt;
- (c) forming a gas channel between the gas cavity and a gas outlet aperture in the mould and
- (d) providing gas flow through the cavity between the gas inlet and outlet apertures.

Preferably, the channel between the gas cavity and the outlet aperture is formed by forcing a stream of gas from the outlet aperture toward the cavity. The channel between the gas cavity and the outlet aperture may be formed by perforating the melt using a moveable needle at the outlet aperture.

The gas injection moulding apparatus may comprise a heat exchanger to cool the injection gas prior to injection into the mould. This heat exchanger may comprise a coiled section of piping, through which injection gas flows, and this coiled portion of piping may be immersed in a liquid having a lower temperature than that of the gas, so cooling the gas. The cooling liquid could be, for example, liquid nitrogen.

The injection gas may be at a lower temperature than the ambient air temperature and/or may be nitrogen. As before, the temperature of the injection gas may be in the range 0 °C to -176 °C, preferably in the range -10 °C to -50 °C, and more preferably around -25 °C.

The gas may enter or exit the mould by means of injection needles. A further aspect of the invention is a gas injection needle comprising a first part defining a gas channel and a movable member that can extend beyond the first part thereby to extend the gas channel. Preferably, the moveable member is located coaxially within the gas channel, and the moveable member preferably is elongate and movable axially within the gas channel. Most preferably, the movable member is displaced to extend beyond the end of the gas channel.

Another aspect of the invention is a gas injection/exhaust needle for use in injection moulding comprising a gas channel and a shutoff member moveable by activating means from a closed position to an open position in which open position the shutoff member is retracted into the body of the needle. Preferably, the shutoff member is located co-axially within the gas channel and is elongate and moveable axially within the gas channel. Preferably the activating means comprises a rod and piston activated pneumatically or hydraulically. Most preferably, the shutoff member is moveable to the open position by the action injection gas pressure on a first face of the piston and/or the shutoff member is moveable to the closed position by the application of pneumatic pressure on a second face of the piston. Preferably, the injection gas exits or enters the gas channel through an aperture at the open end of the channel. The injection gas may exit or enter the gas channel through at least one aperture located in the wall of the channel. The injection gas may exit or enter the gas channel radially and the end of the channel may be sealed. The injection gas may exits or enter the gas channel at an angle to the axis of the channel.

Gas injection moulding apparatus in accordance with the invention will now be described, by way of example only, with reference to the following schematic drawings in which:

Figure 1 is a schematic diagram of a gas injection moulding system for use in accordance with the invention;

Figure 2 (a) and (b) show two method stages of gas injection moulding in accordance with one aspect of the invention;

Figure 3 (a), (b) and (c) show three method stages of gas injection moulding in accordance with another aspect of the invention;

Figure 4 (a), (b), and (c) presents a flow diagram summarising alternative process stages of gas injection moulding methods in accordance with the invention;

Figure 5 is an exploded view of a first gas injection needle assembly used in accordance with the invention;

Figure 6, (a) and (b) schematically show two operational states of the end of the gas injection needle shown in Figure 5;

Figure 7 is a perspective, partly cut away view of a second gas injection needle used in a further aspect of the invention;

Figure 8 is a perspective, partly cut away view of part of the gas injection needle shown in Figure 7;

Figure 9 is a side view of the part of the gas injection needle shown in Figure 8;

Figure 10 is a perspective, partly cut away view of a needle sleeve for use with the second gas injection needle and;

Figure 11 (a) and (b) show another needle sleeve for use with the second gas injection needle.

Referring to Figure 1, a gas injection moulding system 1 comprises gas injection moulding apparatus 10 and associated process control equipment. Moulding apparatus 10 comprises a mould 12, which may be a two part type mould or any other type known in the art, that defines a mould cavity 14. Melt material 16 is injected into the mould cavity 14 from a melt reservoir 18, and via a melt inlet aperture 20. A gas inlet aperture 22, which may comprise an injection needle 24, allows injection of gas 26 into the melt 16. A corresponding gas outlet 28 which can comprise needle 30 may also be provided, as well as an outlet 32 for the melt.

Associated process control equipment is provided to control the ingress and egress of gas and melt to and from the mould cavity 14. Injection gas, for example nitrogen, is supplied by gas injection equipment 34 comprising a gas generation unit 36 and gas pressure control module 38, the pressure control module 38 being controlled by a set point input handle 40. In one aspect of the invention, the injection gas line may comprise a heat exchanger 42 to cool the gas prior to its injection into the mould cavity 14 and the heat exchanger may comprise a coil 44 immersed in a cooling material such as liquid nitrogen. In a further aspect of the invention the gas injection needles 24 and/or 30 may be movable (as described later) and in this case are actuated by, for example, an actuator 46 controlled by a controller 48 as shown for needle 24. A controller 48 may also be used to control other aspects such as the gas injection equipment 34 and the heat exchanger 44, as well as various process valves shown at a, b and c for example. It may be possible to recycle the injected gas once it has passed through the mould as shown by a process stage d. However, this may not be an advantage as the injection gas is readily available and re-circulation of the gas can cause contamination in the gas stream by the melt material.

Referring to Figure 2, parts a and b, there are shown two steps in a gas injection moulding method according to a first aspect of the invention. In Figure 2a,

a first stage of the moulding process is shown wherein a melt material 16 is injected into cavity 14 in mould 12 via aperture 20 from a melt reservoir 18. (For simplicity in this case the process valves are not shown). Figure 2b shows the later gas injection stage of the method where gas such as nitrogen is injected through aperture 22 to form a gas cavity 26 inside the melt material. Once the gas cavity has dispersed the melt into all corners of the mould the pressure is held at a pre-set level until the melt cools and hardens. In one aspect of the present invention, the injected gas 26 is cooled to below the ambient air temperature outside the mould prior to being injected into the mould, for example by means of heat exchanger coil 44. Before injection into mould 12, the gas is preferably cooled to between 0°C and -176°C. Within this range a preferable temperature for the gas is about -25 °C. Once the melt is sufficiently dispersed, the cooled gas is held at a static pressure and thermal energy passes from the hot melt into the cooled gas, thereby providing a greater temperature gradient than if gas at ambient temperature were used, and so speeding up the cooling process. Low temperature gas is typically injected into the melt stream and then vented to atmosphere near or at the end of the cooling cycle.

In another embodiment low temperature gas is injected into the melt stream and that gas is then expanded stepwise during the cooling cycle, cooling of the injected gas thereby resulting from the well known Joule-Thompson effect. Thus, the injected gas may be vented in stage-wise to successively lower pressure levels, for example from 170 bar to 130 bar and then to 80 bar and finally to atmospheric pressure. Alternatively the injected gas may be expanded continuously from the initial pressure of for example 170 bar to a lower pressure or to atmospheric pressure.

In yet another embodiment low temperature gas is injected into the melt and then during the cooling cycle partly vented, for example from 170 bar to an intermediate pressure of, for example, 130 bar. Further gas is then injected into the melt to restore the pressure of the gas in the melt to 170 bar. This process may be repeated several times, during a cooling cycle, optionally venting the gas to a different intermediate

pressure each time. Thus, each time gas is vented the above mentioned Joule-Thompson effect produces a decrease in injected gas temperature.

Reduction of injected gas temperature during the cooling cycle will increase the temperature driving force for heat-transfer from the melt to the injected gas. This will normally result in an increased rate of heat-transfer and thus an advantageous reduction in gas cooling cycle time.

Turning to Figure 3, a gas injection moulding process according to a further aspect of the invention is shown. Parts a and b of Figure 3 generally correspond to the equivalent parts to Figure 2 but, in this case, an additional process stage is shown at c. Between process stages b and c, a channel 31 (see Figure 3c) is formed that allows gas flow from the gas cavity 26 within the melt material 16 to a gas outlet 28, which again may be in the form of a needle 30. This allows circulation of the injection gas through the cavity 26 formed between the inlet 22 and the outlet 28 as shown by the direction arrows in Figure 3c. By circulating the gas, greater heat transfer between the hot melt and the circulating gas is achieved and so the cooling time again is reduced. An even greater reduction in cooling time is achieved if cooled gas is used as in the static process already described for Figure 2 a and b.

Figure 4 summarises three aspects of the invention in a flow diagram. In Figure 4a the process stages of the static or 'no-flow' process for example, using a single gas inlet, are shown. Low temperature gas such as nitrogen is used but it is not circulated once it has entered the mould and it is held at a static pressure. In this case heat exchange between the melt, the mould and the gas takes place by conduction between the melt and the mould as well as convection between the static gas and the melt. Parts b and c of Figure 4 show flow diagrams for a case where gas flows through the mould once the melt has been dispersed, i.e. as already shown schematically in Figure 3 earlier. In both cases a multiple needle aperture or

Injection system is needed with apertures to allow gas to both enter and exit the gas cavity and circulate to remove heat from the melt.

In the process where gas circulates in and out of the mould, a method is needed to form the channel 31 between the gas cavity and an outlet aperture, for example between the gas cavity 26 and outlet aperture 28 shown in Figure 3. There are several ways of achieving this, according to the gas bubble length and type of needle used.

If the gas bubble length is sufficient to reach the second needle position (e.g. needle 30 in Figure 3c), then the (thin) layer of material covering this needle can be removed by the use of high pressure gas injected through this needle (30). Alternatively, in the event of a greater thickness of material covering the second, or outlet needle, a channel can be formed by injecting a reverse flow of gas at this second needle, or a movable needle can be used, as described below.

Figures 5 and 6 show a first gas injection nozzle assembly that can be used in the apparatus of the invention. Referring to Figure 5, a retractable or movable venting needle 50 is shown, comprising a needle body 52 and a gas channel or needle sleeve 54. Channel 54 is connected to body 52 via an annular attachment 56. A movable central needle member or pin 58 is located co-axially within sleeve 54. In use, channel 54 directs gas to or from the melt. Pin 58 has a groove 59 and a conical end section 60. Pin 58 can move axially out or in channel or sleeve 54 as shown by the double headed arrow. The body 52 of the needle device may have planar surfaces 62 to allow easy location within moulding apparatus, and respective gas inlets and gas outlets shown at 64a and 64b. Pressurised gas enters at inlet 64a, forcing pin member 58 outward and allowing gas flow from the needle. Body 52 may also comprise a notch 65, again to allow easy location of the body in a mould. A chamber or cavity 66 houses further components of the device. These components are held in position by screws 70 that pass through apertures 72 in a lid

74 of the device. The lid contains a seal 76 having screw holes 78, an o - ring seal 80, a plunger 82, a spring member, for example a coil spring 84 and a limiting sleeve 86. The limiting sleeve 86 serves to control axial displacement of pin member 58 and pin member 58 is attached to plunger 82.

Figure 6 a and b show the function of the pin member 58 within channel 54 in more detail. As can be seen from Figure 6, the end 60 of member 58 comprises a front planar surface 90 and a tapered conical surface 88. The tapered conical surface 88 allows easy location of end 60 against channel sleeve 54. Figure 6a shows the situation where pin 58 is located within channel 54, that is, the case where there is no gas flow and the melt material can build up over the end of needle. In Figure 6b a later stage is shown where pin 58 has moved outward in the direction of arrow I and gas flow is allowed in direction of arrows II . The outward movement of the pin 58 causes its end 60 to rupture the melt layer around it forming a channel between the outlet and the gas cavity in the melt. Thus, the movable needle shown in Figures 5 and 6 can be used for example as needle 30 in Figure 3 to form gas channel between the gas cavity, or bubble within the melt and a gas outlet.

As described, the invention enables reduced cooling times in gas injection moulding. This is achieved by the different aspects of the invention, namely (a) the use of cooled injection gas that is held statically within the mould and/or (b) the use of circulating gas that passes through the mould to take heat away by convection. In this latter aspect of the invention (b), either cooled gas or gas at ambient temperature may be used and the convective effect of the moving gas leads to greater heat transfer.

Experiments have been undertaken by the applicant to demonstrate the effectiveness of the invention. Thus, cooling cycle times using various embodiments of the invention have been measured. Table 1 shows typical process conditions for these tests. Cavity melt temperature was recorded for the conventional (statically held gas)

process initially, and then for the statically held gas process using chilled gas and finally for the circulating gas process without and with cooled gas. The material ejection temperature is considered to be 80° C and the moulded component residual wall thickness at the temperature measurement point was 2.59 mm.

**Table 1 Process Conditions Used in Comparative Tests of Cooling Cycle Time**

Processing Parameter	Melt Temperature (° C)	Mould Temp (° C)	Fill Time (sec)	Gas Delay Time (sec)	Gas Pressure Time (sec)	Gas Pressure (bar)
Value	240	40	1.9	0.8	30	80

It has been found that when pre-cooled injection gas is held statically within the mould that cooling cycle time may be reduced from 51 seconds (ambient temperature injection gas) to 45 seconds (injection gas cooled to about - 100° C), thus achieving a reduction in cycle time of approximately 12%. In tests using circulating gas passing through the mould a reduction in cycle to 42 seconds (ambient temperature circulating gas) and 40 seconds (cooled circulating gas) was observed. This represents a reduction in cycle time of approximately 17% and 23% respectively.

Figures 7,8 and 9 show a second gas injection/exhaust needle assembly that can be used in the apparatus of the invention and can withstand the high pressure involved in the process (up to 350 bar). Referring to Figure 7, the gas injection needle has a main body 100 comprising a flange section 104 and a co-axially extending cylindrical section 108. The body 100 has a first gas inlet/exhaust port 106 that is supplied with high pressure gas (normally nitrogen). The cylindrical section 108 has on its end face 110 an aperture 112 that connects with a co-axial threaded circular bore 114 within the main body 100. This threaded bore 114 extends inwardly through the remainder of the cylindrical section 108 and also all of

the flange section 104 of the main body 100. A needle sleeve or gas channel 116 (see also Figures 10 - 11) having a flange portion 118 at its first end is located within bore 114, its second (open) end extending axially outward from the main body 100. The needle sleeve 116 is held in place by a grub screw 120 having a central aperture 122 that allows it to be screwed into the threaded bore 114 using a tool such as an Allen key. When the needle sleeve 116 is thus fixed in place aperture 122 allows a shutoff pin (see latter) to pass therethrough.

Figure 8 shows a double acting piston unit 130. An elongate shutoff pin 132 is attached to a piston rod 134 connected to a piston 136. The piston 136 has an o-ring seal 138 and is housed within a cylinder 140. Pin 132 may be attached to piston rod 134 by means of a screw thread. The first end of the cylinder 140 is sealed in a gas tight manner within the longer bore 142 of a generally cylindrical plug 144. Plug 144 has a smaller bore 146 dimensioned to accept piston rod 134. The plug 144 also has an outer threaded section 148 that can be screwed into and connected to a corresponding female thread 150 in flange 104 (See Figure 7) in a gas tight manner using, for example, a Dowty (TM) seal 152. The second end of cylinder 140 is sealed in a gas tight manner to end cap 154 which has a co-axially positioned threaded bore 156 on its outer face 162. Threaded bore 156 is dimensioned to accept an inductive proximity sensor (not shown). The proximity sensor is used to indicate whether the gas injection needle (i.e. piston assembly) is in the open or closed position. High strength adhesive may be used to bond the cylinder 140 to plug 144 and end cap 154 so providing a gas tight seal. End cap 154 also has a second gas inlet port 158. This second gas inlet port 158 is during part of the process supplied with low pressure ( $< 10$  bar) compressed air, which enters portion A of the cylinder 140 and exerts pneumatic pressure on the outer face 164 of piston 136.

The needle described above by reference to Figures 7 to 10 can be used as either an injection needle (see Figure 3 item 24) or an exhaust needle (see Figure 3 item 30). It is very compact and the pressure differential across the needle is minimised

through retraction of shutoff pin 132 during the gas injection and cooling phases. The body 100 is attached by pressure tight sealing means to a moulding tool (not shown) via threaded pins (not shown) that pass through holes 102 in flange section 104 of the needle. In use cylindrical section 108 of the main body 100 is inserted within an appropriately dimensioned port in the moulding tool and sealed in a gas tight manner, for example using an o - ring seal against end face 110 and around needle sleeve 116. The open end of the needle sleeve 116 may be located flush with an internal wall of the mould or it may extend within the mould.

When used as an injection needle, during the polymer injection phase a low pressure compressed air supply is pneumatically connected via the second gas inlet port 158 to side A of the cylinder 140 and this results in the piston 136, piston rod 134 and shutoff pin 132 moving axially through the main body, so that pin 132 and rod 134 seal needle sleeve 116. This prevents the melt, under pressure, from pushing the pin backwards out of its shutoff position which would eventually lead to blockage of the needle sleeve bore 132. When the gas injection phase starts, gas (typically nitrogen) under pressure is supplied through the first gas inlet/exhaust port 106 into the main body. The plug 144 has several channels 160 that allow the high pressure gas to flow from port 106 through bore 114 and plug 154 into the piston rod side P of cylinder 140 and thereby to act upon the inner face of piston 136 pushing it backwards together with piston rod 134 and shutoff pin 132. This allows flow of injection gas from port 106, through bore 114 and along the inside of sleeve 116 to the melt cavity. This action occurs almost instantaneously after the high pressure gas feed is initiated. At the same time conventional process control means are used to isolate the low pressure air supply to port 158 and to vent this port to the atmosphere.

When used as an exhaust needle, injection gas leaves the melt cavity via the inside of sleeve 116, bore 114 and inlet/exhaust port 106. The needle is closed to this gas flow by connecting the low pressure air supply to the second gas inlet port 158. At

this time the pressure of the injection gas leaving the mould will normally be less than 5 bar, preferably about 1 bar.

The needle sleeve 118 may take one of several forms as illustrated in Figures 10 and 11. Figure 10 shows a needle sleeve 116 wherein gas enters or leaves in a generally axial direction.

Figure 11a shows a needle sleeve having an aperture 170 in its wall and Figure 11b a similar needle sleeve having an end stop 172 to prevent axial inlet/exhaust of gas, and thus ensure that all gas enters/exits the needle sleeve radially. By suitably inclining the bore of aperture 170 the injection gas may be directed at any desired angle to the axis. The ability to choose this angle is useful in optimising the gas injection moulding step. The needle sleeve shown in Figure 11 allows injection gas to be delivered parallel to the polymer flow and this has been found to improve bubble symmetry and minimise surface imperfections (for example, blisters and localised surface gloss differences). A needle sleeve may be simply replaced by removing the locking grub screw 120 inside the cylindrical portion 108, thus allowing the sleeve to be slid out and replaced by one of different size or type. The locking grub screw is then returned and tightened in order to lock the new sleeve into place. The shutoff pin 132 may also have to be replaced in order to match any change in needle sleeve 116 dimensions. The shutoff pin 132 can be simply changed by unscrewing it from the piston rod 134.

The control of the low pressure air supply to the port 158 is achieved by a 3/2 way spring loaded solenoid valve. An electronic timer controls the on/off status of the solenoid valve. The electronic timer starts counting when it is energised. During the energising period the solenoid valve is open, supplying low pressure air through the port 162 and moving the pin 132 into its shutoff position. When the desired time has elapsed the electronic timer is de-energised and consequently the solenoid valve also so venting low pressure air to the atmosphere. At the same time high pressure gas

(usually nitrogen) enters port 106 and results in the piston assembly moving backwards so that the needle is switched to an open position allowing high pressure gas to be injected through the needle into the polymer melt stream.

### We Claim

1. A gas injection moulding method wherein a mould is provided comprising gas inlet and gas outlet apertures and the method includes the step of flowing the injection gas between the gas inlet and outlet apertures in use.

2. A gas injection moulding method using a mould having a melt inlet aperture, gas inlet aperture and gas outlet aperture comprising the following stages:

- (a) injecting a melt into the mould;
- (b) injecting gas from the inlet aperture in the mould into the melt to form a gas cavity within the melt;
- (c) forming a gas channel between the gas cavity and the gas outlet aperture in the mould; and
- (d) providing gas flow through the cavity between the gas inlet and outlet apertures.

3. An apparatus for gas injection moulding comprising a mould having inlet apertures for the ingress of gas and melt material into the mould, and outlet aperture for the egress of gas and melt from the mould and wherein use of the apparatus comprises the following stages:

- (a) injecting a melt into the mould;
- (b) injecting gas from an inlet aperture in the mould into the melt to form a gas cavity within the melt;
- (c) forming a gas channel between the gas cavity and a gas outlet aperture in the mould, and
- (d) providing gas flow through the cavity between the gas inlet and outlet apertures.

4. A gas injection moulding apparatus according to Claim 3 wherein the channel between the gas cavity and the outlet aperture is formed by forcing a stream of gas from the outlet aperture toward the cavity.
5. A gas injection moulding apparatus according to Claim 3 further comprising a movable needle wherein the channel between the gas cavity and the outlet aperture is formed by perforating the melt using the movable needle.
6. An apparatus for gas injection moulding according to Claim 3 wherein the mould apertures comprise injection needles and gas enters and/or exits the mould through the injection needles.
7. A gas injection needle for use in the apparatus for gas injection moulding in accordance with Claim 6 comprising a gas channel and movable member that can extend beyond the gas channel.
8. A gas injection needle for use in injection moulding comprising a gas channel and movable member that can extend beyond the gas channel.
9. A gas injection needle according to Claim 8 wherein the movable member is located coaxially within the gas channel.
10. A gas injection needle according to Claim 8 wherein the movable member is elongate and moves axially within the gas channel.
11. A gas injection needle according to Claim 8 wherein the moveable member is displaced to extend beyond the end of the gas channel.

12. A gas injection/exhaust needle for use in injection moulding comprising a gas channel and a shutoff member moveable by activating means from a closed position to an open position in which open position the shutoff member is retracted into the body of the needle.
13. A gas injection/exhaust needle according to Claim 12 wherein the shutoff member is located co-axially within the gas channel and/or is elongate and moveable axially within the gas channel.
14. A gas injection/exhaust needle according to Claim 12 wherein the activating means comprises a rod and piston activated pneumatically or hydraulically.
15. A gas injection/exhaust needle according to any of Claim 12 wherein the activating means comprises a rod and piston the shutoff member being moveable to the open position by the action injection gas pressure on a first face of the piston.
16. A gas injection/exhaust needle according to Claim 15 wherein the shutoff member is moveable to the closed position by the application of pneumatic pressure on a second face of the piston.
17. A gas injection/exhaust needle according to Claim 12 wherein the injection gas exits or enters the gas channel through an aperture at the open end of the gas channel.
18. A gas injection/exhaust needle according to Claim 12 when the injection gas exits or enters the gas channel through at least one aperture located in the wall of the gas channel.

19. A gas injection/exhaust needle according to Claim 18 wherein the injection gas exits or enters the gas channel at an angle to the axis of the gas channel, or enters the gas channel radially.

20. A gas injection/exhaust needle according to any of Claim 18 wherein the end of the gas channel is sealed.

21. A gas injection moulding method comprising injecting a melt into a mould and injecting gas into the melt to form a gas cavity in the melt, wherein the injected gas is at least partly vented during the melt cooling stage in order to cool the injected gas by thermodynamic effect, such as the Joule-Thompson effect, and so enhance the cooling effect.

22. A method according to Claim 21 wherein the injection gas is vented in steps through a plurality of pressure levels.

23. A method according to Claim 21 wherein additional gas is injected into the mould after a venting step in order to increase the pressure of the gas cavity within the melt.

24. A method according to Claim 21 wherein the pressure of the gas within the cavity of the melt is restored to the pressure therein before venting.

25. A gas injection moulding method comprising injecting a melt into a mould and injecting gas into the melt to form a gas cavity in the melt, wherein the injection gas is cooled to below the external ambient air temperature before being injected into the melt.

26. An apparatus according to Claim 3 wherein the temperature of the injection gas is in the range of  $0^{\circ}\text{C}$  to  $-176^{\circ}\text{C}$ .

27. An apparatus according to Claim 3 wherein the temperature of the injection gas is in the range of  $-10^{\circ}\text{C}$  to  $-50^{\circ}\text{C}$ .

28. An apparatus according to Claim 3 wherein the gas pressure in the mould is in the range 10 to 350 bar and/or the injection gas is nitrogen.

29. An apparatus according to Claim 3 comprising a heat exchanger to cool the injection gas prior to injection into the mould.

30. A gas injection moulding apparatus according to Claim 29 wherein the heat exchanger comprises a coiled portion of piping through which the injection gas flows, the coiled portion of piping being immersed in a liquid at a lower temperature than the initial temperature of the injection gas.

### Gas Injection Moulding Method and Apparatus

A gas injection moulding method comprising injecting a melt into a mould and injecting gas into the melt to form a gas cavity in the melt, wherein the melt is cooled by use of injection gas cooled to below the external ambient air temperature and/or by a continuous flow of injection gas through the mould.

(FIGURE 1)

FIGURE 1

FIGURE 1


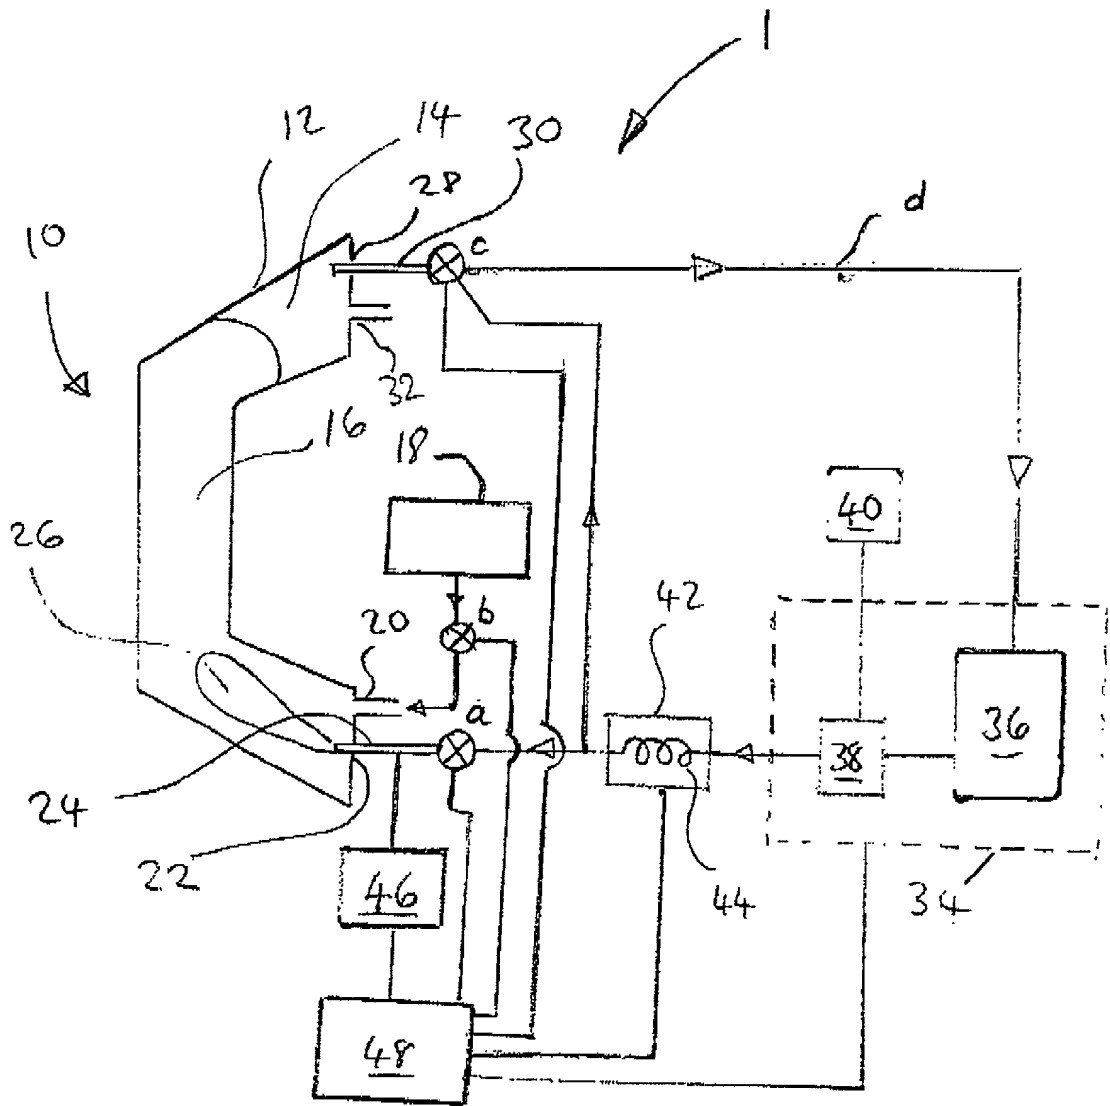


FIGURE 2

(a)

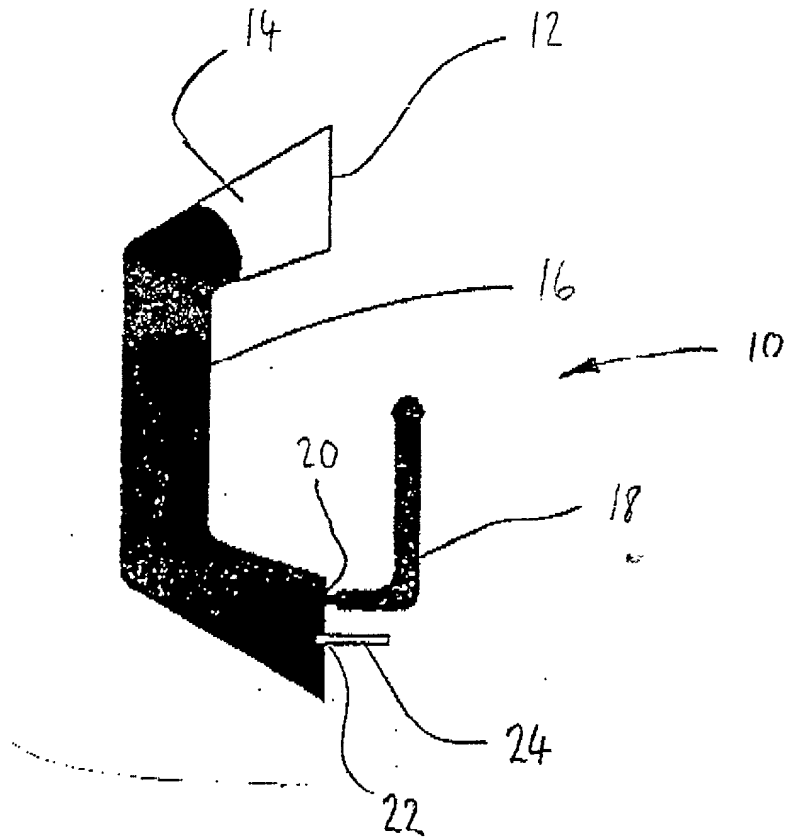

(b)



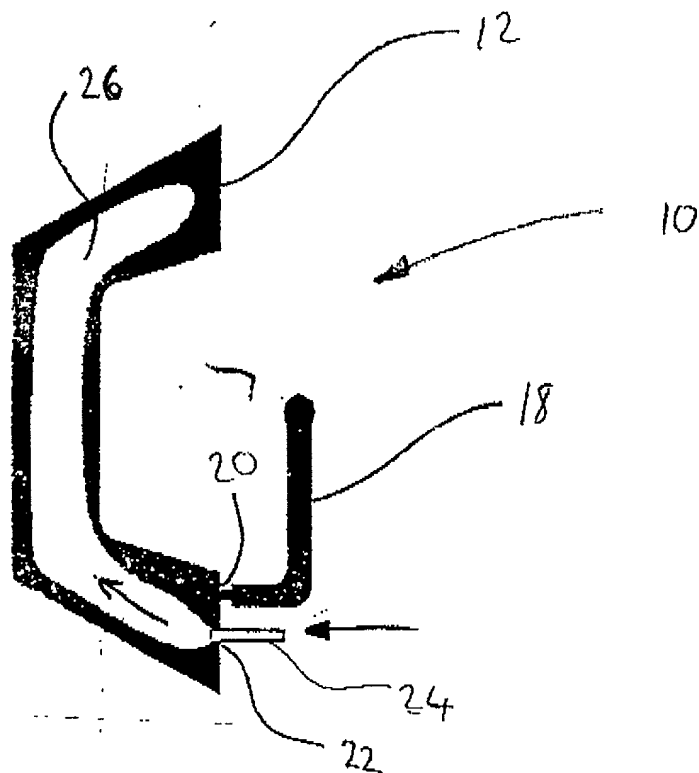


FIGURE 3

(a)

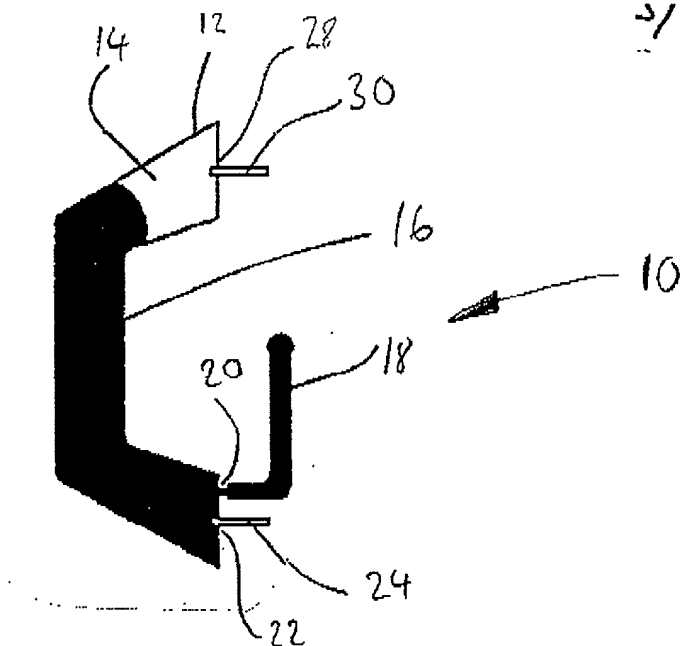

(b)

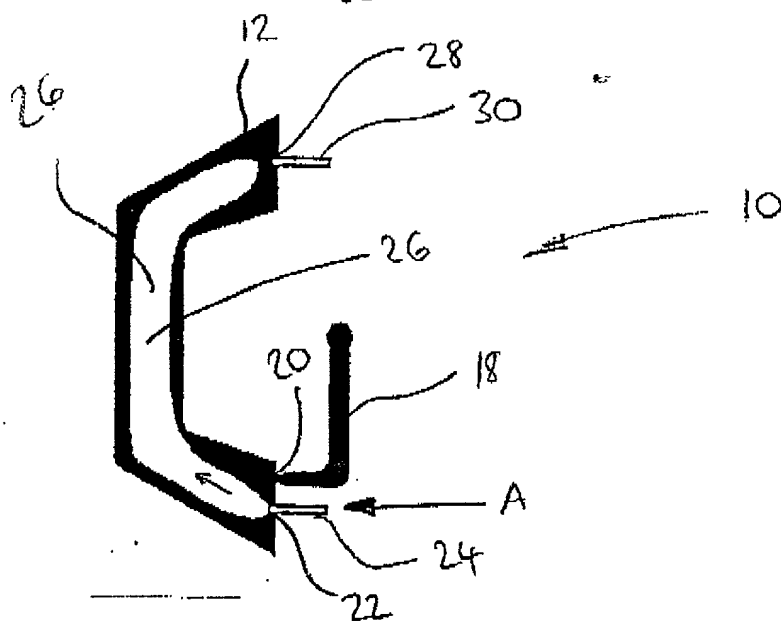

(c)


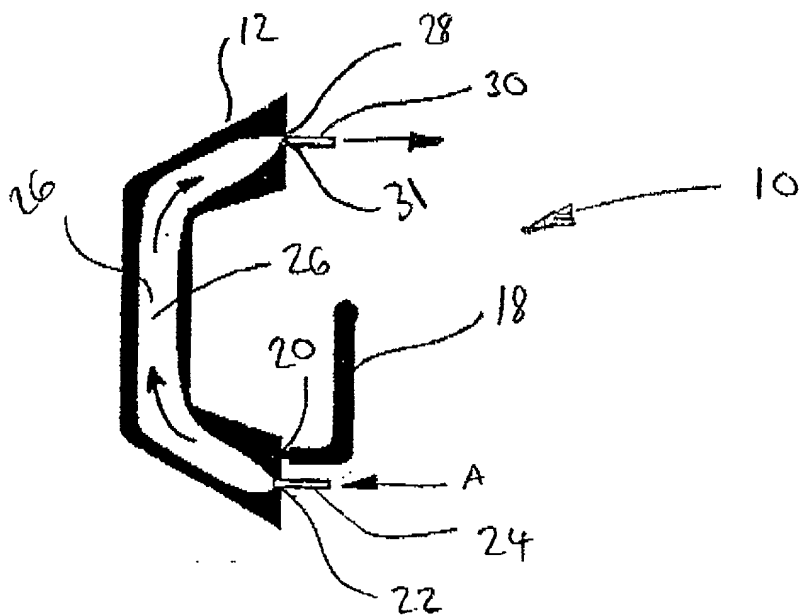


Figure 4

4/8

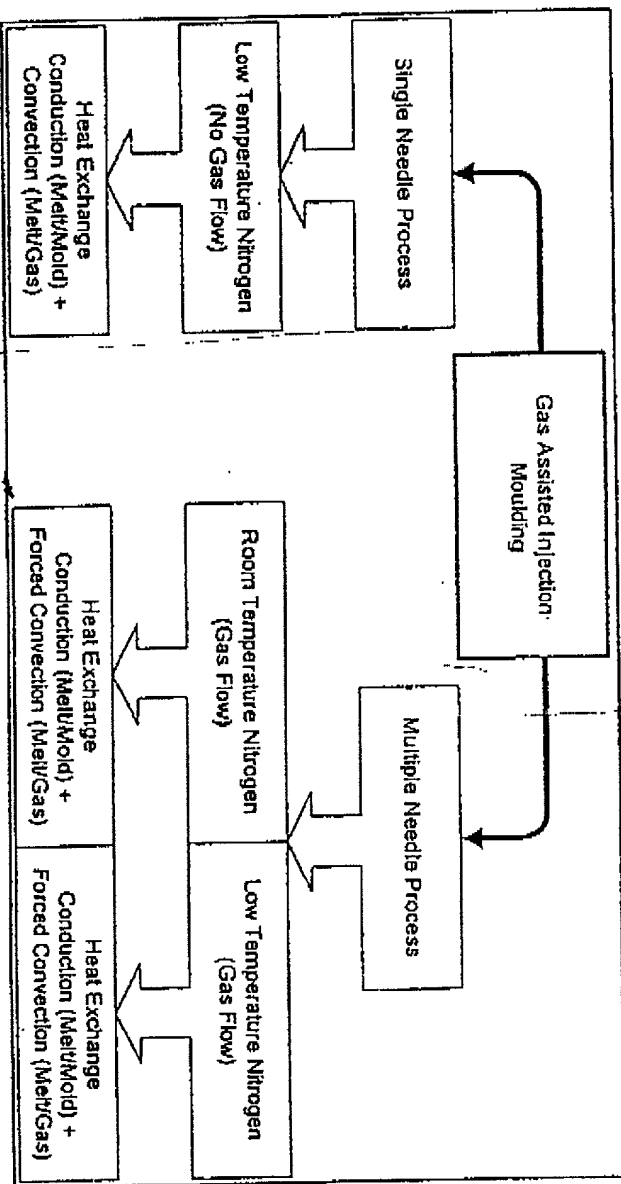

(a)

(b)

(c)

FIGURE 5

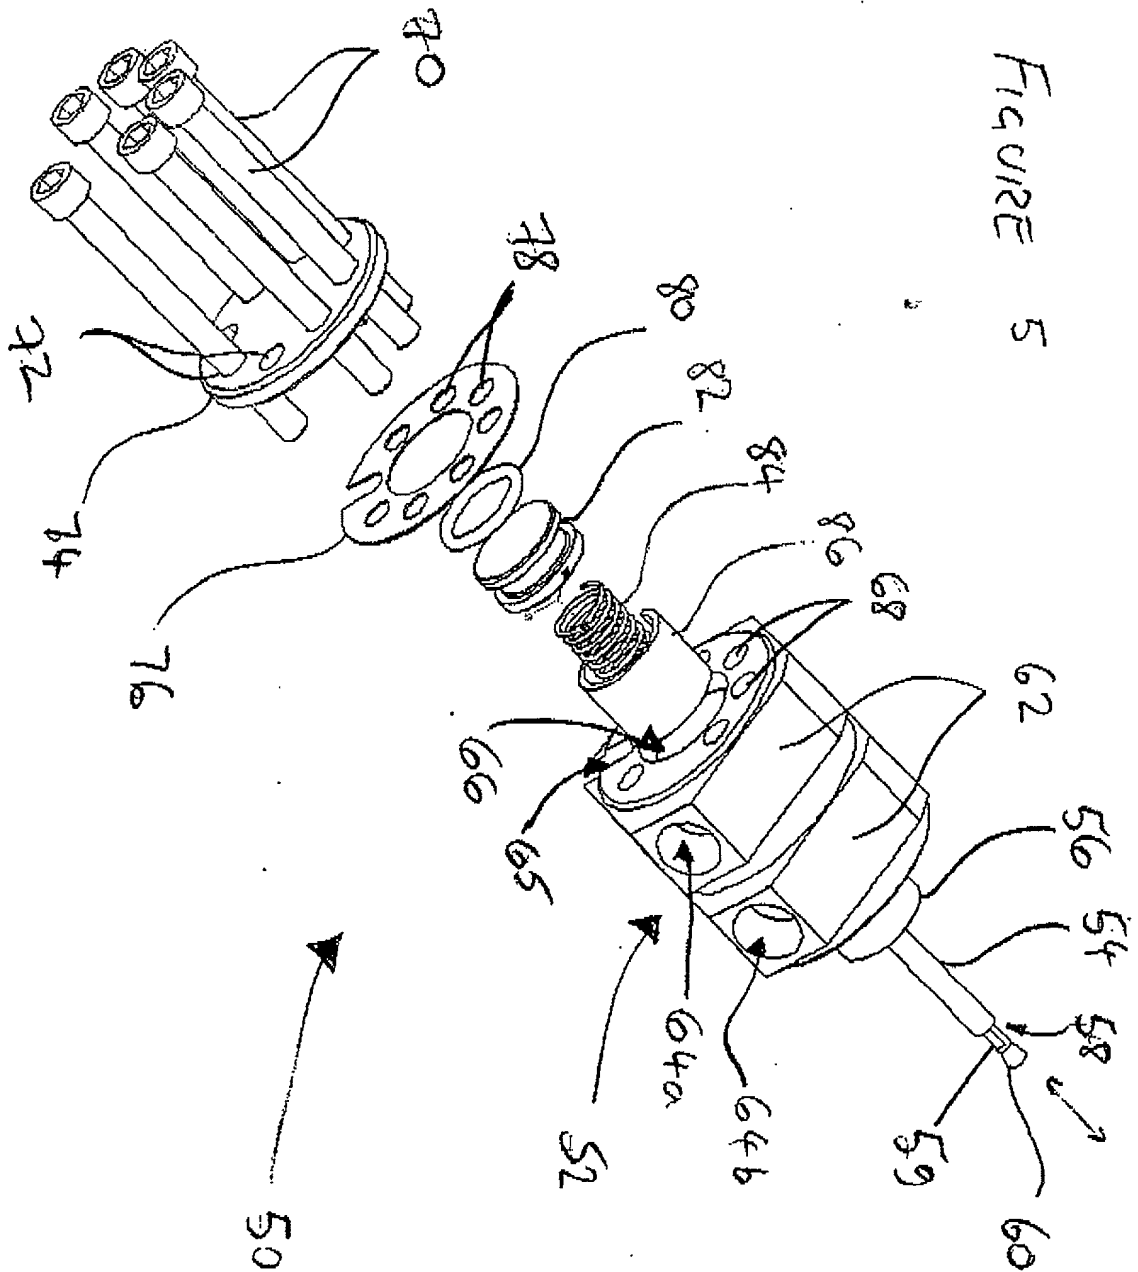


FIGURE 6

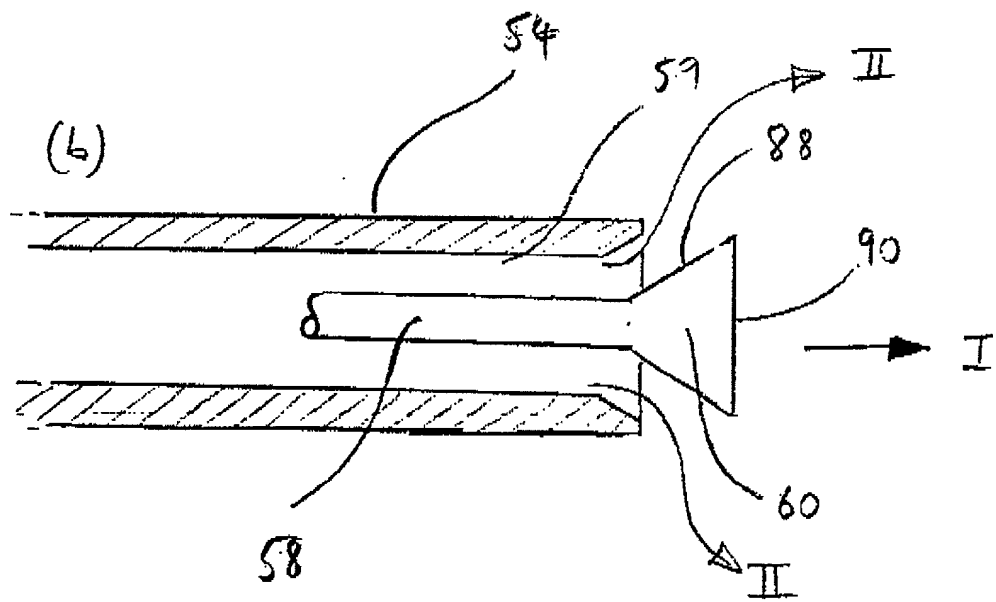
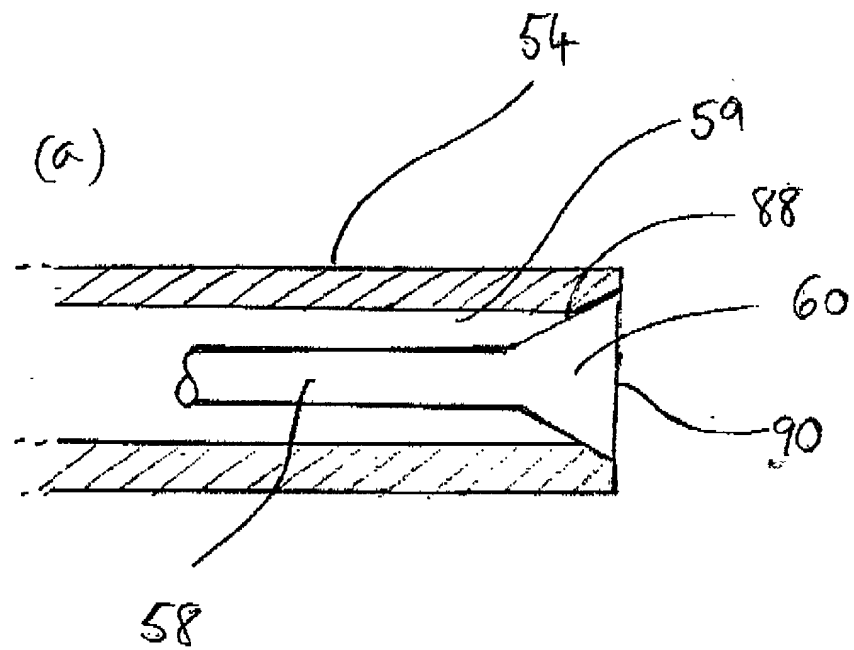


FIGURE 7

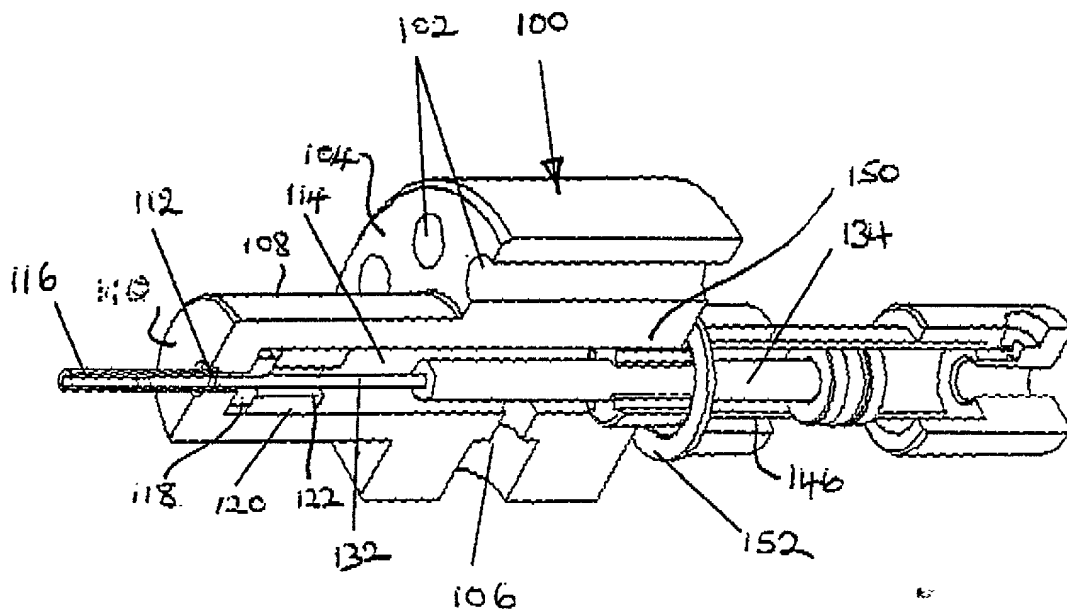


FIGURE 8

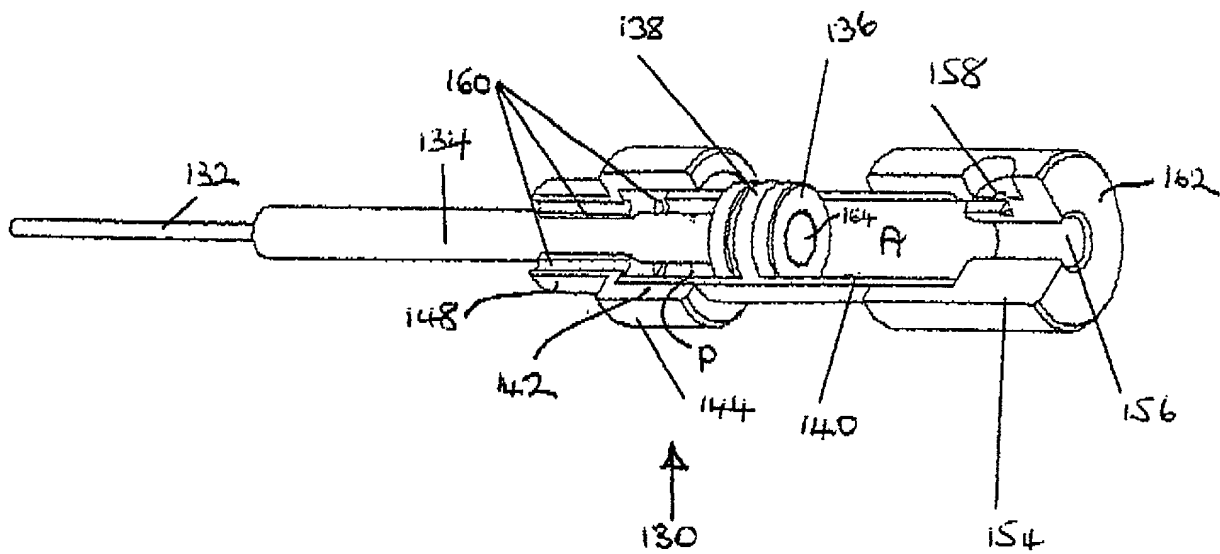


FIGURE 9

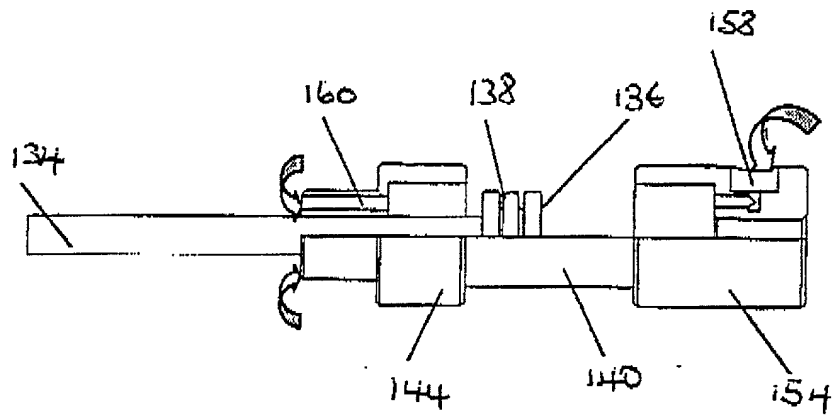


FIGURE 10

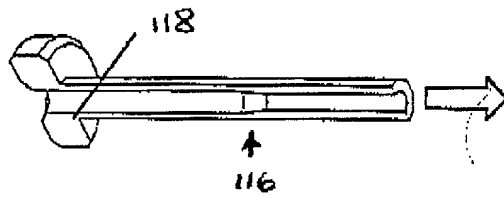


FIGURE 11a

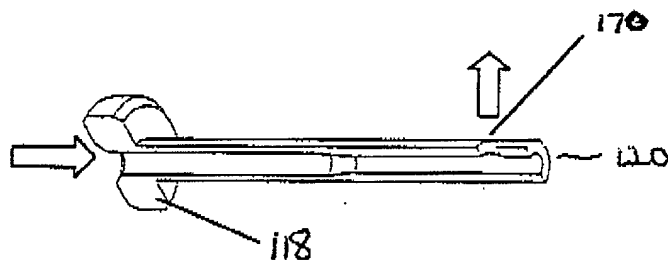


FIGURE 11b

